


Briggs & Stratton Gas Powered Air Compressors for the Service Industry

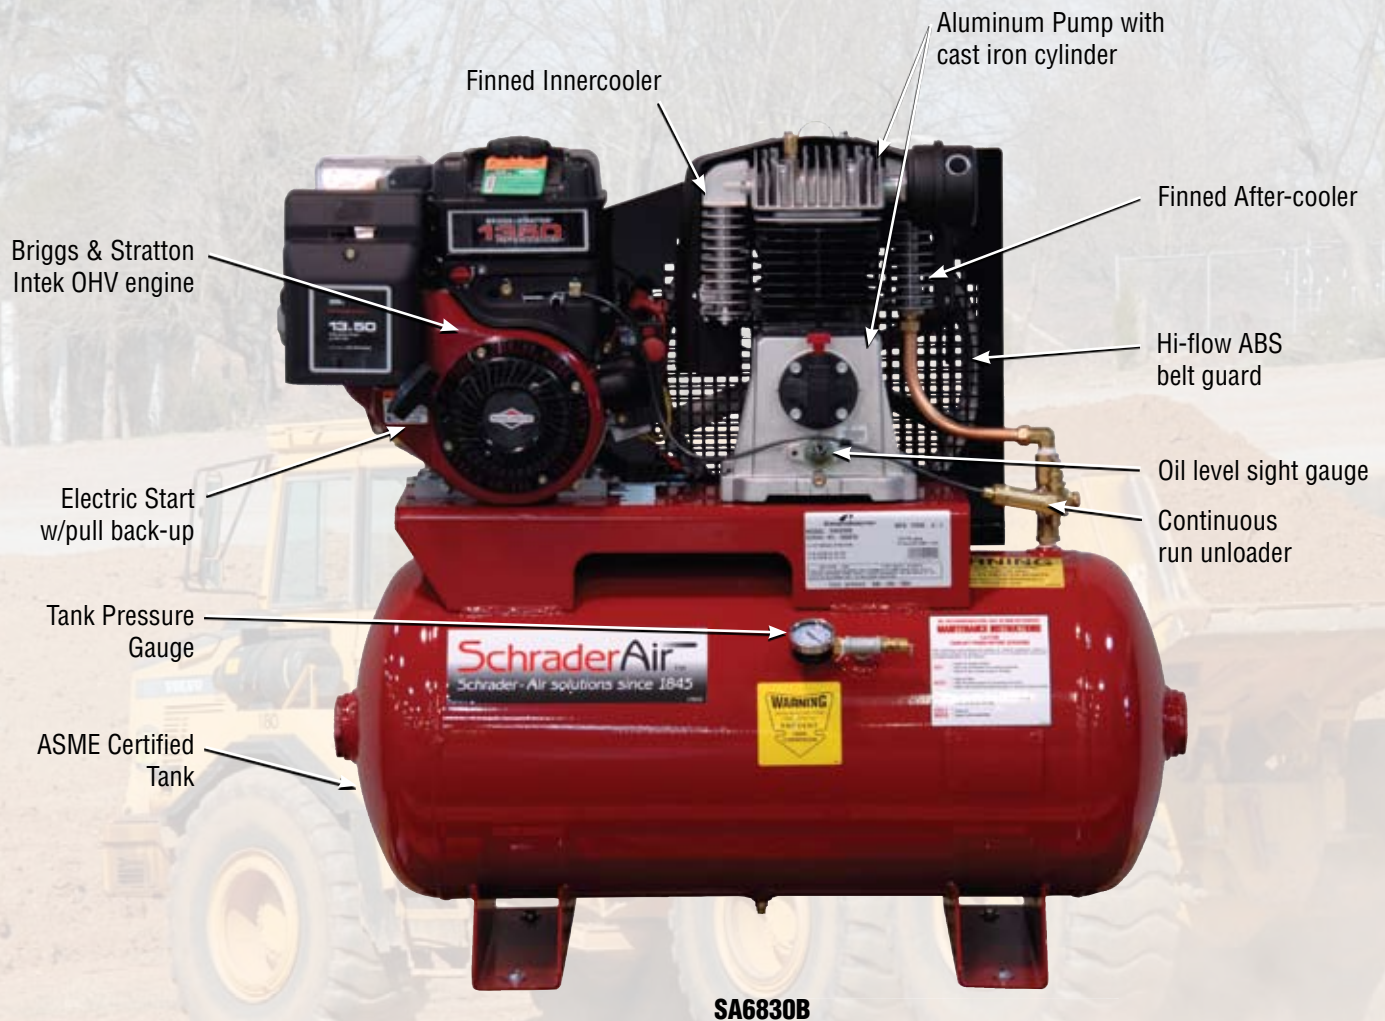

13.5 to 32 SCFM@175 PSI, 2-stage air compressors are well suited for service truck field requirements, tire shops, construction and heavy equipment companies.

SchraderAir's Briggs & Stratton gas powered air compressors are designed for field work where an electrical power source is not available. These medium duty, 2 stage air compressors are equipped with a 30 gallon ASME code horizontal tank with a manual drain. Pressure preset at 145 PSI (load) and 175 PSI (unload).

- Features aluminum head and crankcase for fast heat dissipation.
- Cast iron cylinders for long life and durability.
- Finned intercooler and aftercooler provide low operating temperatures and high efficiency.
- Splash type lubrication.
- Briggs & Stratton Intek OHV or Vanguard OHV electric start engines are equipped with a fuel tank and gas-saving throttle control that meets CARB low emission requirements.
- 30 Gallon ASME tank with manual drain.
- One year limited warranty

Briggs & Stratton Gas Powered Air Compressors for the Service Industry



SA6830B



SA61630B

Specifications

Model #	Engine		Pump					Tank	Dimensions	
	HP/Torque Rating	Type	Cyl.	RPM	Max. PSI	Disp. CFM	SCFM @175 psi	(Gallons)	L x W x H (inches)	Ship Wt.(lbs)
SA6830B	8/13.5	B&S Intek	2	1300	175	19.5	13.5	30	40 x 19 x 39	300
SA61030B	10/14.5	B&S Intek	2	1065	175	24.5	17	30	40 x 19 x 39	302
SA61130B	11/NA	B&S Vanguard	2	800	175	22	16	30	43 x 18 x 39	430
SA61630B	16/NA	B&S Vanguard	4	800	175	41	32	30	50 x 24 x 43	550

Recommended Accessories

Model #	Auto Tank Drain	Vibration Pads Only	Drive Belt	Pump Maintenance Kit	Continuous Run Unloader	Pressure Gauge	Throttle Cable	Pump Air Filter Element
SA6830B	82166	824679	82288613	-	82709	82516	82205BN	82288665
SA61030B	82166	824679	82288613	-	82709	82516	82205BN	82288665
SA61130B	82166	824679	82890	826040	82709	82516	82205BNK	822580(1)
SA61630B	82166	824679	82827	826041	82709	82516	82205BNK	822580(2)